

Pin busbar touch-safe, 16 mm<sup>2</sup> 3-phase, 1016 mm long can be cut, without end caps



Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
General technical data	
phase number	3
Main circuit	
operational current rated value	80 A
Suitability	
suitability for interaction devices with auxiliary switch	No
suitability for interaction devices with N conductor	No
Appearance	
color	light grey
Product details	
product feature insulated	Yes
product function	
• suitable for compact devices	No
• can be cut	Yes
Number	
number of devices suitable for fitting	18
Connections	
type of electrical connection	Pin
Mechanical Design	
module width	18 mm
height	15 mm
width	18 mm
length	1 016 mm
number of modular width units	56
cross-section	16 mm <sup>2</sup>
net weight	630 g
Approvals Certificates	
General Product Approval	other



[Miscellaneous](#)



[Miscellaneous](#)

[Confirmation](#)

### Environment



#### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3710>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3710>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3710](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3710)

**CAX-Online-Generator**


<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

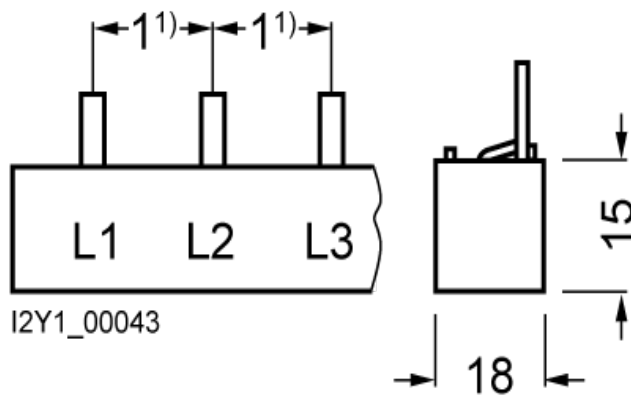

<sup>1)</sup> Pin spacings in MW (Modular widths, 1 MW = 18



---

last modified:

1/29/2025 

